VIRAJ
VSPL GROUP

An ISO 9001 : 2015 Certified Company

TECHNICAL DATA SHEET

FALL PROTECTION EQUIPMENTS

TALON-LE (SRL-P) Polymer Casing with Webbing & Energy Absorber

TALON-LE 6' Para-Aramid & UHMWPE Webbing SRL-LE (ANSI Leading Edge Rated) with High Impact Strength Polymer Housing, swivel eye at anchorage end, other end with load indicator swivel snap hook. Includes one (1) Twin SRL Connector (SF-1700)

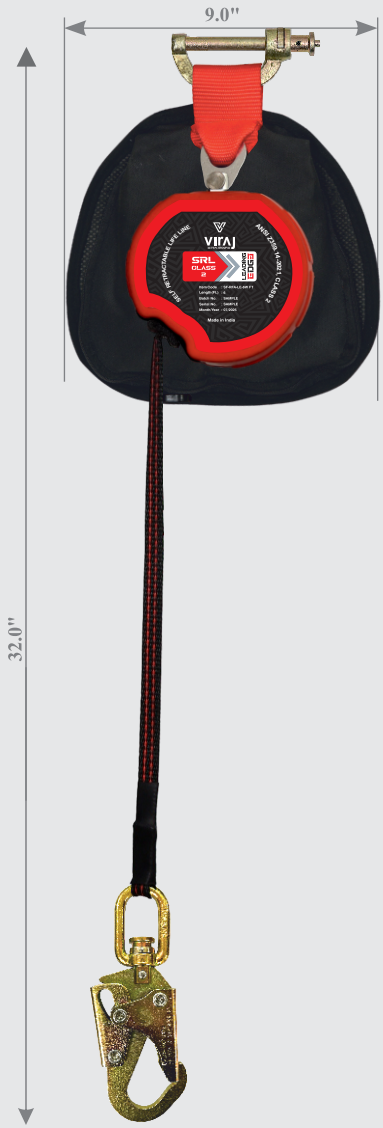

Ref: SF-RFA-LE-6W FT

PHYSICAL PARAMETERS

- Robust & durable plastic casing
- Has swivel anchorage eye at anchorage end
- Swivel Snap Hook at retractable end (Our ref. SF-1404 as per ANSI Z359.12-2009 gate strength 3600 lbs.
- Para-Aramid and UHMWPE Webbing.

LENGTH

- 6 ft.

WEBBING

- Material: Para-Aramid and UHMWPE webbing 0.78 Inches.
- Minimum Breaking strength: 5000 lbs.

WEIGHT

- 3.74 lbs. ± 0.22 lbs.

USER CAPACITY

- ANSI User Capacity: 310 lbs. Max.

RELEVANT STANDARDS

- Meets or Exceeds ANSI Z359.14-2021, CLASS 2.

PRODUCTS LIABILITY INSURANCE
2 Million
VIRAJ GROUP

A Government Recognized Star Export House

C-36 UPSIDC Industrial Area, Rooma, Kanpur- 209402 (UP) INDIA
info@virajsyntex.com
www.virajsyntex.com