VIRAJ VSPL GROUP

SECURE FIRST™

An ISO 9001 : 2015 Certified Company

TECHNICAL DATA SHEET

FALL PROTECTION EQUIPMENTS

Energy Absorbing Expendable Lanyard
Ref: SF-EEAWL-3901 to 3909

Made of 44mm wide Polyester Tubular Webbing.
Webbing Lanyard incorporated with energy absorber.

DESIGN

• All Lanyard with Different combinations of connectors mentioned.

WEBBING

Material: Polyester
Width: 44mm. ± 1mm.
Breaking Strength: 25 KN.

STITCHING THREAD

High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

22 kN Minimum for Lanyard
15 kN Minimum for Energy Absorber

RELEVANT STANDARDS

Meets or Exceeds EN 355:2002

Reference No.	SF-EEAWL-3901	SF-EEAWL-3902	SF-EEAWL-3903	SF-EEAWL-3904	SF-EEAWL-3905	SF-EEAWL-3906	SF-EEAWL-3907	SF-EEAWL-3908	SF-EEAWL-3909
Side - 1	Loop	Loop	SF-1102	Loop	SF-1201	Loop	SF-1201	SF-1102	SF-1201
Side - 2	Loop	SF-1102	SF-1102	SF-1201	SF-1201	SF-1301	SF-1102	SF-1301	SF-1301

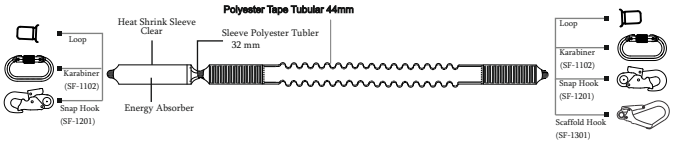

PRODUCTS LIABILITY INSURANCE 2 Million VIRAJ GROUP

CELEBRATING 1994 29 2023 YEARS
QUALITY I SERVICE I PROFESSIONALISM

A Government Recognized Star Export House

C-36 UPSIDC Industrial Area, Rooma,
Kanpur- 209402 (UP) INDIA

info@virajsyntex.com

www.virajsyntex.com