

An ISO 9001 : 2015 Certified Company

Flame Resistant Full Body Harness

Ref: SF-FBH-A-1022(FR)

SECURE FIRST Flame Resistant Range Harnesses have been specially designed for workers engaged in welding and Hot work at height. Webbing of the Flame Resistant Harness is made of a special fibre which is Flame Resistant and can withstand temperatures of upto 700°F / 371°C with out any damage.
VIRAJ 5-Point Adjust Lightweight Full Body Harness

DESIGN

- One dorsal attachment D-ring and two chest attachment textile loops for fall arrest.
- Adjustable Chest-Strap, Shoulder Straps and thigh-straps for easy adjustment.

WEBBING

Material: Flame resistant
Width: 44mm. ± 1mm.
Breaking Strength: 25 KN.

STITCHING THREAD

High-tenacity kavlar

METAL COMPONENT


Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

100kg

RELEVANT STANDARDS

Meets or Exceeds EN361:2002
The webbing is also tested in accordance with ISO 15025 : 2005 and assessed in accordance with ISO 9150:1988 and EN 13463-5:2003.

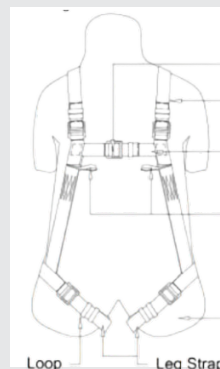

FRONT VIEW



BACK VIEW
Stitching design

