

An ISO 9001 : 2015 Certified Company

### Energy Absorbing Webbing Lanyard

Ref: SF-BRL-3201 to 3209

Made of 44mm wide Polyester Webbing  
Webbing Lanyard incorporated with energy absorber.

#### DESIGN

- All Lanyard with Different combinations of connectors mentioned.

#### WEBBING

Material: Polyester  
Width: 44mm. ± 1mm.  
Breaking Strength: 25 KN.

#### STITCHING THREAD

High-tenacity Polyester

#### METAL COMPONENT


Material: Alloy Steel  
Finish: Silver or Golden Yellow Galvanized

#### CAPACITY RANGE

22 kN Minimum for Lanyard  
15 kN Minimum for Energy Absorber

#### RELEVANT STANDARDS

Meets or Exceeds EN 355:2002

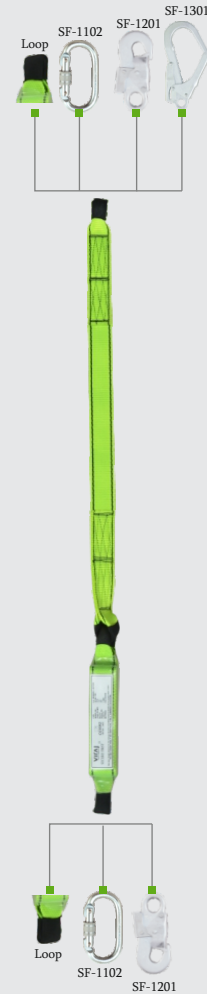

Reference No.	SF-WLE-3201	SF-WLE-3202	SF-WLE-3203	SF-WLE-3204	SF-WLE-3205	SF-WLE-3206	SF-WLE-3207	SF-WLE-3208	SF-WLE-3209
Side - 1	Loop	Loop	SF-1102	Loop	SF-1201	Loop	SF-1201	SF-1102	SF-1201
Side - 2	Loop	SF-1102	SF-1102	SF-1201	SF-1201	SF-1301	SF-1102	SF-1301	SF-1301

