



An ISO 9001 : 2015 Certified Company

BEAM ANCHOR TROLLEY Ref: SF-BA-803 (T)

Provides a movable anchorage point using the length of the Beam to which it is mounted to move along with the user.

DESIGN

- Comes with adjustable flanges for use on different beam sizes
- Highly corrosion resistant and easy to install.
- The wheels of the Trolley provide extremely smooth movement over the beam over which it is mounted.
- Flanges adjustable from 2.99" to 11.81".

MATERIAL

- Aluminium Alloy & Stainless Steel

BREAKING STRENGTH



- Minimum breaking strength:- 5000 lbs

WEIGHT

- 9.27 lbs. \pm 0.02 lbs.

RELEVANT STANDARDS

- Meets or Exceeds ANSI Z359.18-2017 TYPE A

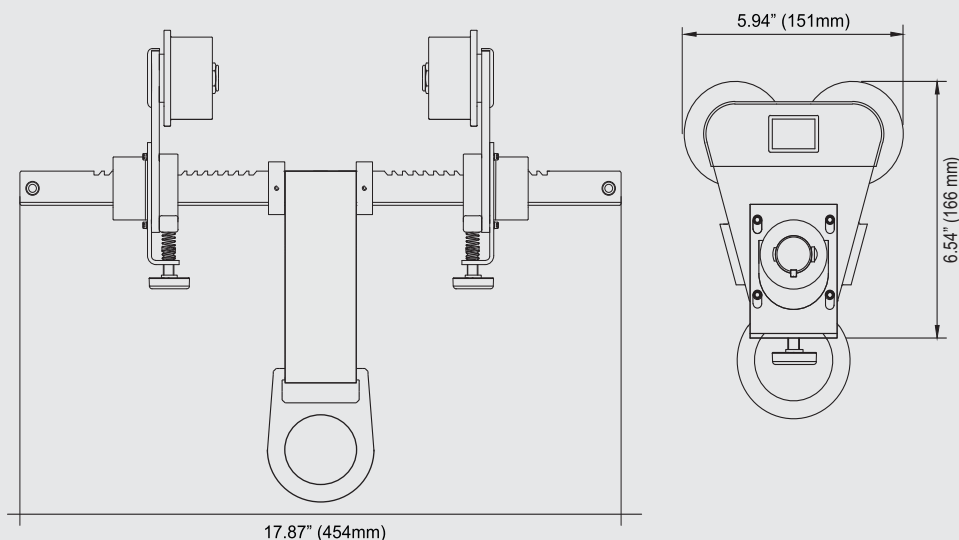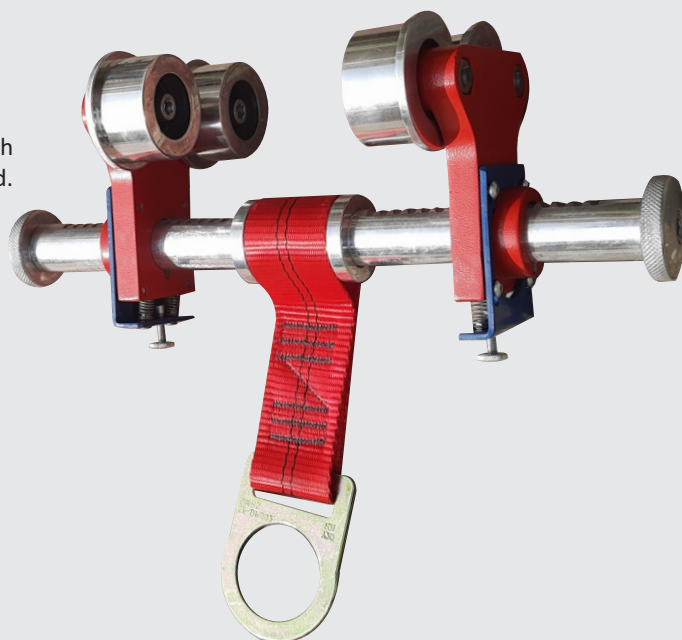

C-36 UPSIDC Industrial Area, Rooma,
Kanpur- 209402 (UP) INDIA

info@virajsyntax.com

www.virajsyntax.com