

An ISO 9001 : 2015 Certified Company

Energy Absorbing Kernmantle Rope Lanyard
Ref: SF-BRLE-3801 to 3809

Made of 12mm Kernmantle Polyamide Rope and 44mm Polyester Webbing.

DESIGN

- All Lanyard with Different combinations of connectors mentioned.

WEBBING & ROPE

Material: Polyester
 Width: 44mm. ± 1mm.
 Dia: 12mm. ± 1mm.
 Webbing Breaking Strength: 25 KN.
 Rope Breaking Strength: 22 KN.

STITCHING THREAD

High-tenacity Polyester

METAL COMPONENT


Material: Alloy Steel
 Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

22 kN Minimum for Lanyard
 15 kN Minimum for Energy Absorber

RELEVANT STANDARDS


Meets or Exceeds EN 355:2002

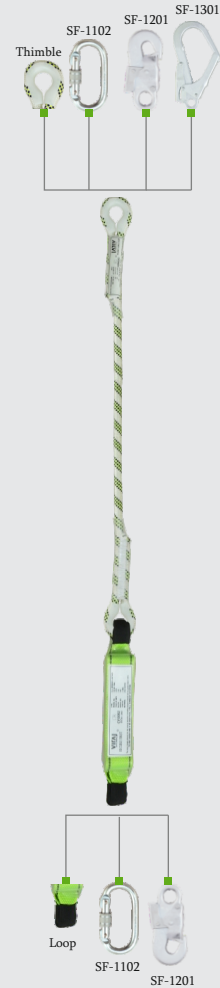

Reference No.	SF-BRLE-3801	SF-BRLE-3802	SF-BRLE-3803	SF-BRLE-3804	SF-BRLE-3805	SF-BRLE-3806	SF-BRLE-3807	SF-BRLE-3808	SF-BRLE-3809
Side - 1	Loop	Loop	SF-1102	Loop	SF-1201	Loop	SF-1201	SF-1102	SF-1201
Side - 2	Loop	SF-1102	SF-1102	SF-1201	SF-1201	SF-1301	SF-1102	SF-1301	SF-1301

TECHNICAL DATA SHEET

FALL PROTECTION EQUIPMENTS

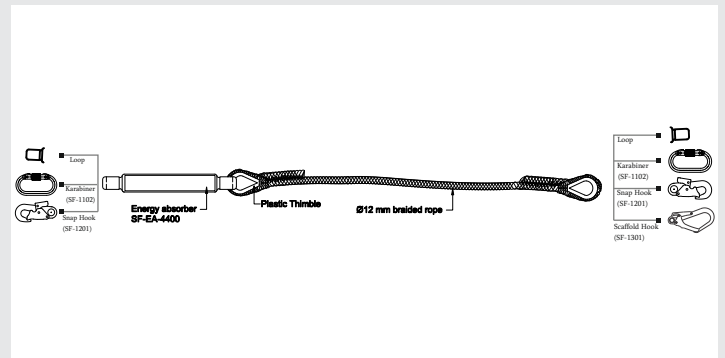

C-36 UPSIDC Industrial Area, Rooma,
 Kanpur- 209402 (UP) INDIA



info@virajsyntax.com



www.virajsyntax.com