

An ISO 9001 : 2015 Certified Company

Energy Absorbing Webbing Lanyard

Ref: SF-NWLE-9201 to 9209

Made of 30mm wide Polyester Webbing Lanyard incorporated with energy absorber.

DESIGN

- All Lanyard with Different combinations of connectors mentioned.

WEBBING

Material: Polyester
Width: 44mm ± 1MM, 30MM ± 1mm.
Breaking Strength: 25 KN.

STITCHING THREAD

High-tenacity Polyester

METAL COMPONENT

Material: Alloy Steel
Finish: Silver or Golden Yellow Galvanized

CAPACITY RANGE

22 kN Minimum for Lanyard
15 kN Minimum for Energy Absorber

RELEVANT STANDARDS


Meets or Exceeds EN 355:2002



Reference No.	SF-NWLE-9201	SF-NWLE-9202	SF-NWLE-9203	SF-NWLE-9204	SF-NWLE-9205	SF-NWLE-9206	SF-NWLE-9207	SF-NWLE-9208	SF-NWLE-9209
Side - 1	Loop	Loop	SF-1102	Loop	SF-1201	Loop	SF-1201	SF-1102	SF-1201
Side - 2	Loop	SF-1102	SF-1102	SF-1201	SF-1201	SF-1301	SF-1102	SF-1301	SF-1301

TECHNICAL DATA SHEET

FALL PROTECTION EQUIPMENTS

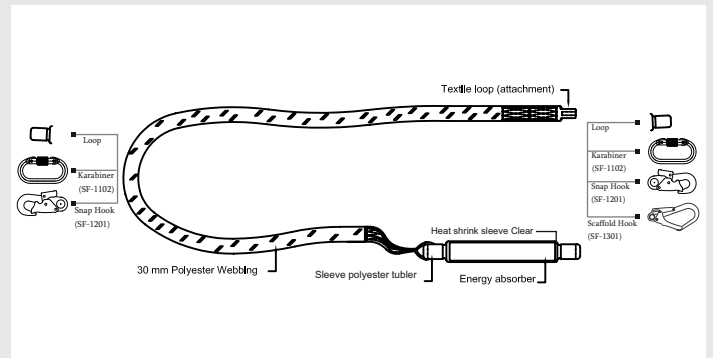

C-36 UPSIDC Industrial Area, Rooma,
Kanpur- 209402 (UP) INDIA



info@virajsyntax.com



www.virajsyntax.com